

Surface Grinder

- Supplied with magnetic chuck
- Fitted with one shot centralised lubrication to slideways and leadscrews
- Diamond wheel dresser supplied
- Single phase electrics
- Complete with cabinet



Item No. 2013YZ

ITEM NO.	2013YZ
SPECIFICATION	
Table surface area	305 x 152mm
Table traverse	320mm
Table cross traverse	170mm
Grinding wheel size	178 x 31.7 x 12.7mm
Max. distance from wheel ctr to table	280mm
Min. distance from wheel ctr to table	89mm
Vertical feed per spindle revolution	0.04/0.08/0.14
Spindle speed	3600rpm
Spindle motor	560w/240v
Floor space	440 x 430mm
Weight	226kg

Universal Cutter Grinder

Compact, versatile grinder. Suitable for HSS and carbide tools.
Optional tooling will accommodate end mills, twist drills or lathe tools

- Supplied to accept either R8 or 5C collets. Not necessary to buy dedicated collets
- Single phase
- 24 position universal head
- Diamond wheel dresser included

Universal Cutter Grinder R8
Item No. 2020R8

Universal Cutter Grinder 5C
Item No. 20205C



ITEM NO.	2020R8/20205C
SPECIFICATION	
Collet capacity	
R8	20mm
5C	28mm
Maximum grinding diameter	25mm
Taper angle	0° - 180°
Relief angle	0° - 44°
Negative angle	0° - 52°
Spindle speed	5,200 rpm
Cup grinding wheel	100x50x20mm
Motor	250w/240v
Weight	45kg
Dimensions	L450 x W400 x H350mm

OPTIONAL TOOLING

Twist drill holder
Item No. 55745C
Item No. 5574R8

End mill holder
Item No. 5575C
Item No. 5575R8

Lathe tool holder
Item No. 5576

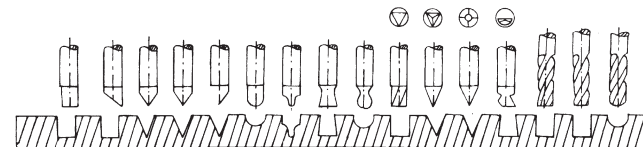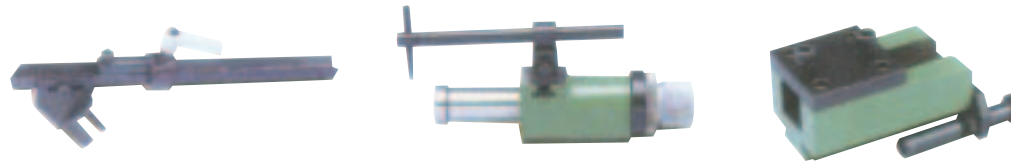

- Two models R8 or 5C to accept standard collets

Replacement silicone wheel
Item No. 9526



Diamond replacement wheel
Item No. 5577



Diamond cup wheel
Item No. 5577A

